
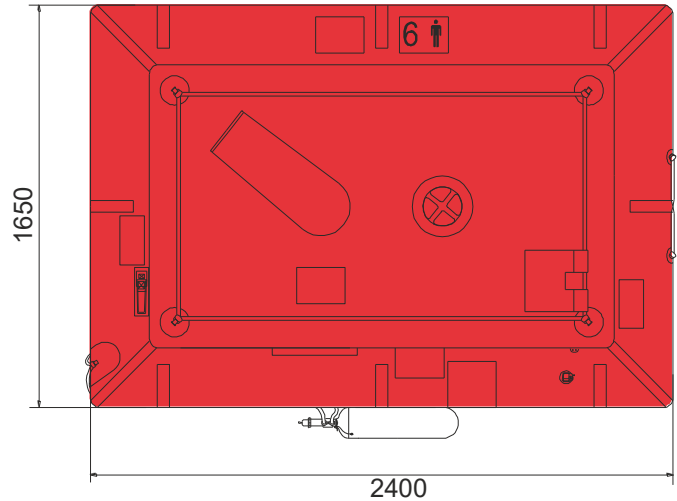
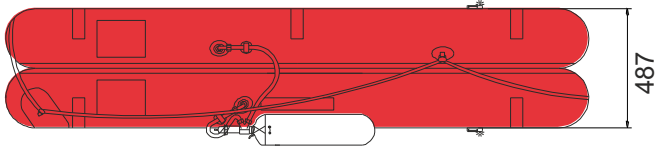


# IBA 06 MAN OPEN REVERSIBLE INFLATABLE LIFERAFT ROUND CONTAINER



| 6 MAN   |   | ROUND CONT   |                |  |
|---|---|--------------|----------------|--|
| <b>Container</b>  | <b>N11</b>                              |              |                |  |
| Dimensions  | X: 1020 mm                              | Y: 476 mm    | Z: 440 mm      |  |
|   | X: 3' 4,16"                             | Y: 1' 6,75"  | Z: 1' 5,33"    |  |
| Liferaft Net Weight   | 36 kg / 80 pounds                       |              |                |  |
| Max. height stowage   | 15 m / 50'                              |              |                |  |
| Painter line length   | 25 m / 83'                              |              |                |  |
| Inflation Cylinder  | 1 X 4 liter                             |              |                |  |
| <br><b>Crate</b> | X: 1070 mm                              | Y: 560 mm    | Z: 610 mm      |  |
|   | X: 3' 6,13"                             | Y: 1' 10,05" | Z: 2' 0,02"    |  |
|   | 48 kg / 106 pounds                      |              |                |  |
|   | 0,366 m <sup>3</sup> / 12,91 cubic foot |              |                |  |
| <b>Towing force</b>   | <b>2 knots</b>                          |              | <b>3 knots</b> |  |
| Without sea anchor  | 28 daN                                  |              | 60 daN         |  |
| With sea anchor   | 85 daN                                  |              | 155 daN        |  |

|                   |             |
|-------------------|-------------|
| <b>Approvals:</b> | <b>USCG</b> |
|-------------------|-------------|

|                      |          |                  |
|----------------------|----------|------------------|
| IBA 06 cont rond.doc | Issue: 7 | Date: 21/02/2017 |
|----------------------|----------|------------------|

Dimensions and weight +/- 5%  
 SURVITEC SAS reserves the right to change specification without notice.  
 For installation, add minimum +10mm for clearance to dimensions of the container.