

RESCUE BOATS

Range of products dedicated to search and rescue applications, our **RESCUE BOATS** are designed to offer speed, seaworthiness, shock mitigation, low freeboard, stability and manoeuvrability in urgent and arduous rescue operations

GENERAL CHARACTERISTICS

- ▶ Rigid inflatable outboard engine type rescue boats:
 - manufactured with a durable neoprene fabric (inflatable structure) and GRP composite (rigid hull)
 - easily accessible & can be launched quickly with a lifting sling & release hook in any circumstances
- ▶ Towing capacity: liferaft with 150 persons (maximum)
- ▶ Adapted design for yacht

REGULATION

DESIGNED AND MANUFACTURED IN CONFORMITY WITH:
 . SOLAS regulation (except RIBO 340)
 . EC Directive 2002/35/EC (RIBO 340)
 APPROVALS: EC(MED) / USCG




RIBO 340
(*BV approval)



RIBO 450

STORAGE ONBOARD SHIP

- ▶ Our rescue boats are stored on:
 - aluminum tilting cradle (RIBO 450)
 - specially designed cradle
- ▶ Rescue boat secured on cradle with lashing



RIBO 450 under davit



RIBO 450 on cradle

TECHNICAL DATA

RIBO 340*	CAPACITY	5 persons
	DIMENSIONS L x w	3.40 m x 1.71m
	WEIGHT	641.5kg (operational)
	TOWING	Bow towing points & V bridle / Aft towing V bridle / Transom towing points
	HOISTING	Bow / aft lifting points + sling Release hook SWL ≥ 750kg
	ENGINES	YAMAHA 25HP


RIBO 450	CAPACITY	6 persons
	DIMENSIONS L x w	4.50 m x 1.90m
	WEIGHT	901kg (operational) EC 867kg (operational) US
	TOWING	Bow towing points & V bridle / Aft towing V bridle / Transom towing points
	RIGHTING SYSTEM	Righting bag assist
	HOISTING	Bow / aft lifting points + sling Release hook SWL ≥ 950kg ≤ 1.5 ton
	ENGINES	EVINRUDE/YAMAHA/MERCURY 25HP / 40HP
	STEERING ITEM	RIBO 450 can be provided with or without a steering console

FRB 600	CAPACITY	6 persons
	DIMENSIONS L x w	6 m x 2.45m
	WEIGHT	1505kg (operational)
	TOWING	Bow towing post / Aft towing V bridle / Transom towing points
	RIGHTING SYSTEM	Self-righting frame + buoyancy
	HOISTING	Lifting frame Release hook SWL ≥ 1500kg
	ENGINES	EVINRUDE 75HP / 90HP


RIBO 600	CAPACITY	6 persons
	DIMENSIONS L x w	6 m x 2.45m
	WEIGHT	1283kg (operational)
	TOWING	Bow towing points & V bridle / Aft towing V bridle / Transom towing points
	RIGHTING SYSTEM	Self-righting frame + buoyancy
	HOISTING	Bow / aft lifting points + sling Release hook SWL ≥ 1500kg
	ENGINES	YAMAHA 70HP MERCURY 90HP

ILLUSTRATION OF RESCUE BOATS



RIBO 450

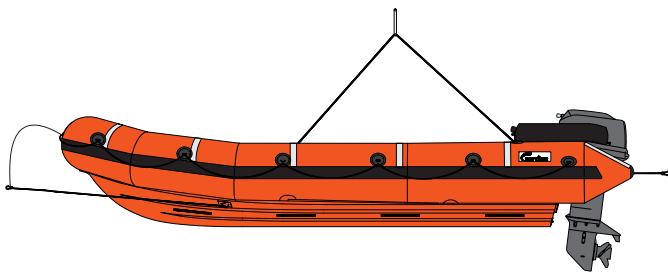


RIBO 450 can be equipped with a console (as an option)

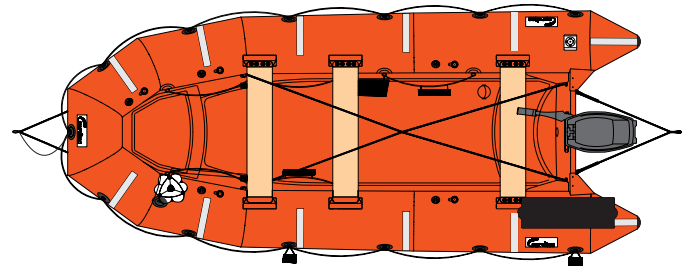

FRB 600

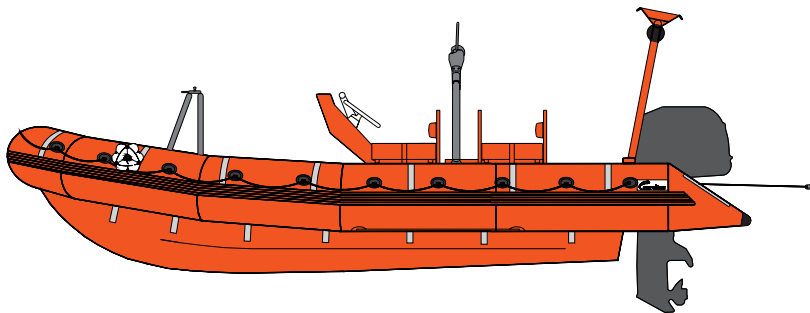

FRB600 self-righting

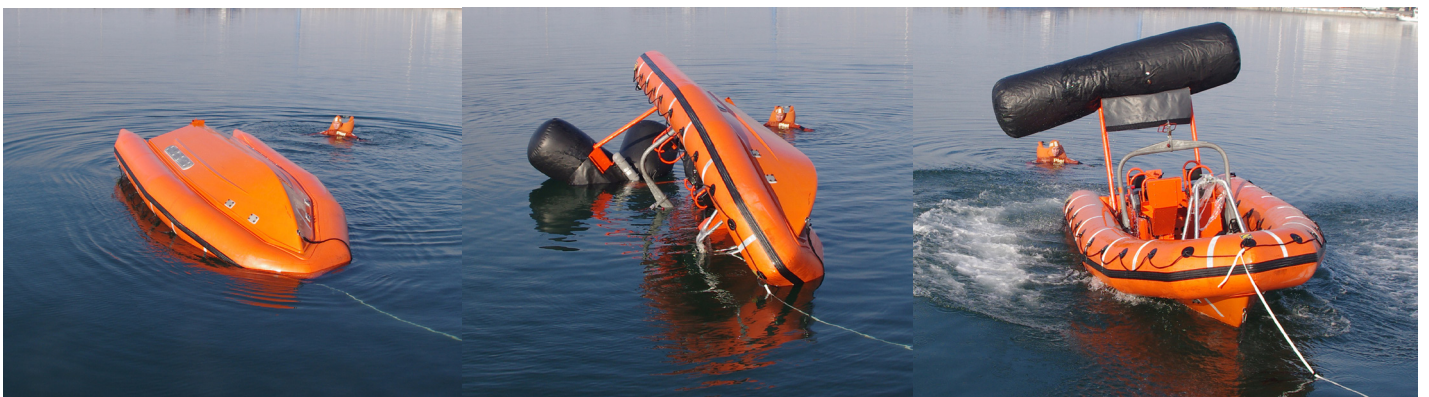

SURVITEC SAS reserves the right to change specification without notice. For installation, add minimum +10mm for clearance to dimensions of the container.