
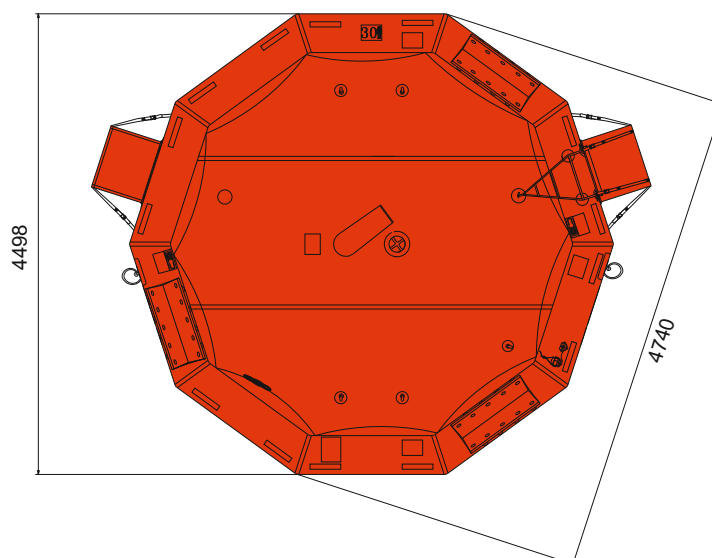
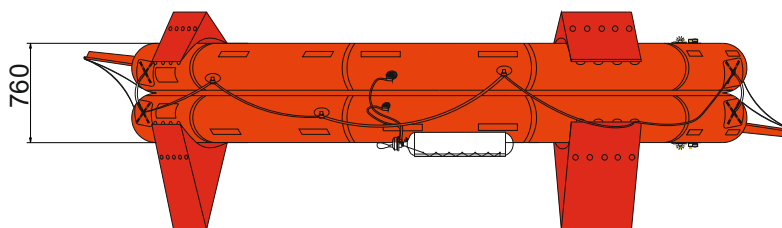


## MARINE EVACUATION SYSTEM (MES) ORIL 30 ASSOCIATED WITH SMALL INFLATABLE SLIDE (SIS)



| 30 MAN MES SIS  | HSC PACK                                |                |              |
|---|---|----------------|--------------|
| <b>Container</b>  | <b>N13</b>                              |                |              |
| Dimensions  | X: 1275 mm                              | Y: 610 mm      | Z: 590 mm    |
|   | X: 4' 2,2"                              | Y: 2' 0,02"    | Z: 1' 11,23" |
| Liferaft Net Weight   | 100 kg / 221 pounds                     |                |              |
| Painter line length   | 20 m / 66'                              |                |              |
| Inflation Cylinder  | 1 x 20 liter                            |                |              |
|  | X: 1320 mm                              | Y: 650 mm      | Z: 700 mm    |
|   | X: 4' 3,97"                             | Y: 2' 1,6"     | Z: 2' 3,56"  |
|   | 127 kg / 280 pounds                     |                |              |
|   | 0,601 m <sup>3</sup> / 21,21 cubic foot |                |              |
| <b>Towing force</b>   | <b>2 knots</b>                          | <b>3 knots</b> |              |
| Without sea anchor  | 102 daN                                 | 138 daN        |              |
| With sea anchor   | 147 daN                                 | 227 daN        |              |

ORIL 30 MES SIS cont rond.doc

Issue: 5

Date: 26/10/2015


Dimensions and weight +/- 5%  
SURVITEC SAS reserves the right to change specification without notice.  
For installation, add minimum +10mm for clearance to dimensions of the container.

## SIS (SMALL INFLATABLE SLIDE)




Slide in valise

| SIS                    | 1,70 m            |          |          | 2,20 m            |            |          |
|------------------------|-------------------|----------|----------|-------------------|------------|----------|
| <b>Valise</b>          |                   |          |          |                   |            |          |
| Dimensions             | X:670mm           | Y:300mm  | Z:260mm  | X:720mm           | Y:425mm    | Z:295mm  |
|                        | X:2' 2,38"        | Y:11,82" | Z:10,24" | X:2' 4,35"        | Y:1' 4,74" | Z:11,62" |
| Slide net weight       | 15 kg / 34 pounds |          |          | 19 kg / 42 pounds |            |          |
| Max. evacuation height | 1,70 m            |          |          | 2,20 m            |            |          |
| Firing line length     | 1,50 m            |          |          | 1,50 m            |            |          |
| Inflation cylinder     | 1 x 2,83 litres   |          |          | 1 x 4 litres      |            |          |

|  |                            |            |         |                            |            |         |
|--|----------------------------|------------|---------|----------------------------|------------|---------|
| <br>Crate | X:830mm                    | Y:540mm    | Z:330mm | X:830mm                    | Y:540mm    | Z:330mm |
|  | X:2' 8,68"                 | Y:1' 9,26" | Z:1' 1" | X:2' 8,68"                 | Y:1' 9,26" | Z:1' 1" |
|  | 17,6 kg / 39 pounds        |            |         | 21,6 kg / 48 pounds        |            |         |
|  | 0,148 m3 / 5,23 cubic foot |            |         | 0,148 m3 / 5,23 cubic foot |            |         |

| SIS                    | 2,70 m            |            |          | 3,20 m              |            |          |
|------------------------|-------------------|------------|----------|---------------------|------------|----------|
| <b>Valise</b>          |                   |            |          |                     |            |          |
| Dimensions             | X:720mm           | Y:450mm    | Z:295mm  | X:800mm             | Y:450mm    | Z:295mm  |
|                        | X:2' 4,35"        | Y:1' 5,72" | Z:11,62" | X:2' 7,5"           | Y:1' 5,72" | Z:11,62" |
| Slide net weight       | 27 kg / 60 pounds |            |          | 28,5 kg / 63 pounds |            |          |
| Max. evacuation height | 2,70 m            |            |          | 3,20 m              |            |          |
| Firing line length     | 1,50 m            |            |          | 1,50 m              |            |          |
| Inflation cylinder     | 1 x 6 litres      |            |          | 1 x 6,7 litres      |            |          |

|  |                            |            |         |                            |            |         |
|--|----------------------------|------------|---------|----------------------------|------------|---------|
| <br>Crate | X:830mm                    | Y:540mm    | Z:330mm | X:830mm                    | Y:540mm    | Z:330mm |
|  | X:2' 8,68"                 | Y:1' 9,26" | Z:1' 1" | X:2' 8,68"                 | Y:1' 9,26" | Z:1' 1" |
|  | 29,6 kg / 66 pounds        |            |         | 31,1 kg / 69 pounds        |            |         |
|  | 0,148 m3 / 5,23 cubic foot |            |         | 0,148 m3 / 5,23 cubic foot |            |         |

**Approvals:** **EC - TC**

ORIL 30 MES SIS cont rond.doc Issue: 5 Date: 26/10/2015

Dimensions and weight +/- 5%  
 SURVITEC SAS reserves the right to change specification without notice.  
 For installation, add minimum +10mm for clearance to dimensions of the container.